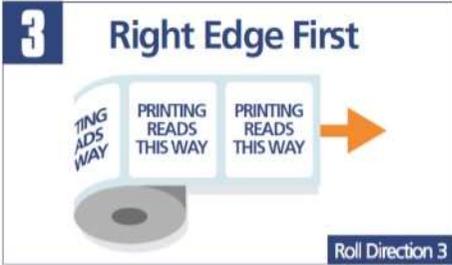
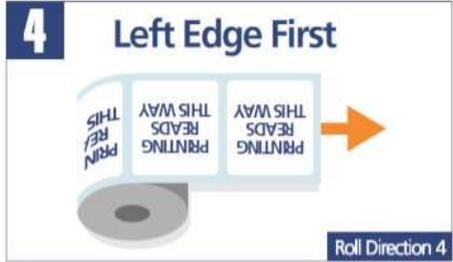


Line 1	product/s	still wine, fortified	
	bottles	can do:	we need to see and trial samples of imported or non-standard bottles to ensure compatibility.
		750ml	
		1000ml	
		<i>3L &amp; 6L filled by hand</i>	
<b>Depalletizing</b>		fully automated sweep arm	pallets with cardboard layer boards, cardboard nests, more than 4 layers of glass or some Reverse Taper glass can only be manually depalletized
<b>Filling</b>	temperature	16 - 20 °C	
	turbidity	suitable for grade of filtration your winemaker chooses	<a href="#">Click here to see the Filtration Chart</a>
	is turbidity too high?	options	i. review grade of filtration into bottle ii. filter in tank farm prior to bottling iii. in-line filter during bottling
	filter	lenticular	
	membrane	cartridge	sterile 0.45µm
	bottle inversion and rinsing	water or gas	
	bottles/hr	6,000	
	max. bottle height	350mm - screwcap (BVS) glass	
		365mm - cork mouth glass	
	inert gas	Carbon Dioxide or Nitrogen	latest technology inert gas protection at bottle rinsing, filling and closure application
<b>Traceability</b>	bottle print or label print	ink jet	32 character capacity (julian date and time, lot number =13 characters) at base of bottle
<b>Quality</b>	electronic	fill level	
<b>Wine closure</b>		cork	vacuum corking
		30 x 60mm screwcap	
<b>Quality</b>	electronic	closure presence	
<b>Capsules</b>		PVC, Aluminium, Tin or Poly laminate	

<b>Labels</b>	number of labelling heads	3	front, back + neck/medal
	label presentation	front/back on separate rolls	
	max label height (dimension)	180mm	
	max label width	200mm	Follow WPA guidelines for max recommended width.
	min application height from base of bottle	18mm	65mm for medals
	roll core diameter	76mm	
	max roll diameter	290mm	
	roll direction	right hand leading	<b>roll direction #3</b> 
	label type	self adhesive	
	label print	lot numbers on back label (3mm high max 14 characters)	optional
<b>Cartons</b>	format	6 or 12 pack upright	Regular Slotted Cartons (RSC) - small panel left -JR-R big panel, small panel format
		laydown	hand packed
	construction	machine erected and glued	
	in-line printing	ink jet printing (solvent based ink)	multiple line printing side or end. Print no lower than 30mm from base of carton and no higher than 25mm from top
	carton barcode	thermal transfer pre-print and apply (100mm x 70mm)	One label side or end -will not comply to GS1 print standard.
<b>Quality</b>	electronic	number of bottles in carton	IR camera
<b>Palletizing</b>	machine	various stacking configurations	various range of pallets accepted, must be of a consistent size. Slip sheets can be applied
	pallet label	options available	SSCC can be printed (100mm x 140mm)

Line 2	product/s	still wine, fortified	
	bottles	can do:	we need to see and trial samples of imported or non-standard bottles to ensure compatibility.
		375ml	
		500ml	
		750ml	
		1.0L	
		1.5L	
		<i>3L &amp; 6L filled by hand</i>	
<b>Depalletizing</b>		by hand	
<b>Filling</b>	temperature	16 - 20 °C	
	turbidity	suitable for grade of filtration your winemaker chooses	<a href="#">Click here to see the Filtration Chart</a>
	is turbidity too high?	options	i. review grade of filtration into bottle ii. filter in tank farm prior to bottling iii. in-line filter during bottling
	filter	lenticular	
	membrane	cartridge	sterile 0.45µm
	bottle inversion and rinsing	gas only	
	bottles/hr	3,000	
	max. bottle height	350mm - screwcap (BVS) glass	
		365mm - cork mouth glass	
	inert gas	Carbon Dioxide	
<b>Traceability</b>	bottle print or label print	ink jet	32 character capacity (julian date and time, lot number =13 characters) at base of bottle
<b>Quality</b>	electronic	fill level	
<b>Wine closure</b>		cork	vacuum corking
		30 x 60mm screwcap	
<b>Quality</b>	electronic	closure presence	
<b>Capsules</b>		PVC, Aluminium, Tin or Poly laminate	
<b>Labels</b>	number of labelling heads	3	front, back + neck/medal
	label presentation	front/back on separate rolls	

	max label height (dimension)	150mm	including web
	max label width	140mm	Follow WPA guidelines for max recommended width.
	min application height from base of bottle	18mm	65mm for medals
	roll core diameter	76mm	
	max roll diameter	290mm	
	roll direction	left hand leading	roll direction #4 
	label type	self adhesive	
	label print	lot numbers on back label (3mm high max 14 characters)	optional
<b>Cartons</b>	format	6 or 12 pack upright	hand packed
		laydown	hand packed
	construction	glue	
	in-line printing	ink jet printing (solvent based ink)	multiple line printing side or end. Print no lower than 30mm from base of carton and no higher than 25mm from top
	carton barcode	thermal transfer pre-print and apply by hand (100mm x 70mm)	
<b>Palletizing</b>		by hand	
	pallet label	options available	SSCC 100mm x 140mm