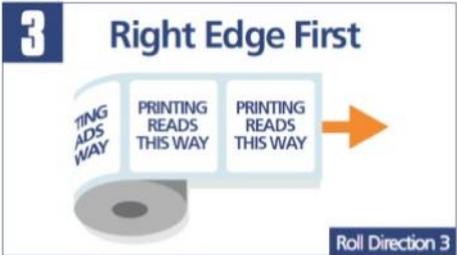
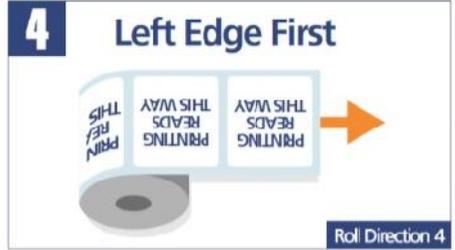


Line 1	product/s	still wine, fortified	
		can do:	we need to see and trial samples of imported or non-standard bottles to ensure compatibility.
		500ml	
		750ml	
		1.0L	
		<i>1.5L, 3L, 6L filled by hand</i>	
<b>Depalletizing</b>		fully automated sweep arm	pallets with cardboard layer boards, cardboard nests, more than 4 layers of glass or some Reverse Taper glass can only be manually depalletized
<b>Filling</b>	temperature	12 - 20 °C	
	turbidity	suitable for grade of filtration your winemaker chooses	<a href="#">Click here to see the Filtration Chart</a>
	is turbidity too high?	options	i. review grade of filtration into bottle ii. filter in tank farm prior to bottling iii. in-line filter during bottling
	filter	lenticular	
	membrane	cartridge	sterile 0.45µm
	bottle inversion and rinsing	water	
	bottles/hr	6,000	
	max. bottle height	350mm - screwcap (BVS) glass 365mm - cork mouth glass	
	inert gas	Carbon Dioxide or Nitrogen	latest technology inert gas protection at bottle rinsing, filling and closure application
<b>Traceability</b>	bottle print	ink jet	32 character capacity (julian date and time, lot number =13 characters) at base of bottle
<b>Quality</b>	electronic	fill level	
<b>Wine closure</b>		cork	vacuum corking
		30 x 60mm screwcap	
		31.5 x 60mm screwcap	
		LUX internally threaded screwcaps	
<b>Quality</b>	electronic	closure presence	
		external bottle wash	

<b>Capsules</b>		PVC, Aluminium, Tin or Poly laminate	
<b>Labels</b>	number of labelling heads	3	front, back + neck/medal
	label presentation	front/back on separate rolls	
	max label height (dimension)	190mm	
	max label width	200mm	Follow WPA guidelines for max recommended width
	min application height from base of bottle	18mm	65mm for medals
	roll core diameter	76mm	
	max roll diameter	290mm	
	roll direction	right hand leading	<b>roll direction #3</b> 
	label type	self adhesive	
	label print	lot numbers on either front or back label (2mm high max 14 characters)	optional
<b>Quality</b>	electronic	label presence	
<b>Cartons</b>	format	12 or 6 pack upright	Regular Slotted Cartons (RSC) - small panel left -JR-R big panel, small panel format
		laydown	hand packed
	construction	machine erected and glued	
	in-line printing	high definition wax printer	multiple line printing and logo options (max. 60mm high) across one long side. Print no lower than 140mm from base of carton and no higher than 60mm from top
	carton barcode	thermal transfer print and apply (108mm x 85mm)	one label or two labels on adjacent sides of carton. <a href="#">See Carton Barcode and Text Positioning</a>
<b>Quality</b>	electronic	number of bottles in carton	
<b>Palletizing</b>	machine	various stacking configurations	various range of pallets accepted, must be of a consistent size. Slip sheets can be applied
	pallet label	options available	

Line 2	product/s	still wine, fortified	
		can do:	we need to see and trial samples of imported or non-standard bottles to ensure compatibility.
		375ml	
		500ml	
		750ml	
		1.0L	
		1.5L Claret	
		<i>1.5L Burgundy, 3L, 6L filled by hand</i>	
<b>Depalletizing</b>		by hand	
<b>Filling</b>	temperature	12 - 20 °C	
	turbidity	suitable for grade of filtration your winemaker chooses	<a href="#">Click here to see the Filtration Chart</a>
	is turbidity too high?	options	i. review grade of filtration into bottle ii. filter in tank farm prior to bottling iii. in-line filter during bottling
	filter	lenticular	
	membrane	cartridge	sterile 0.45µm
	bottle inversion and rinsing	water	
	bottles/hr	3,000	
	max. bottle height	350mm - screwcap (BVS) glass 365mm - cork mouth glass	
	inert gas	Carbon Dioxide or Nitrogen	latest technology inert gas protection at bottle rinsing, filling and closure application
<b>Traceability</b>	bottle print	ink jet	32 character capacity (julian date and time, lot number =13 characters) at base of bottle
<b>Quality</b>	electronic	fill level	
<b>Wine closure</b>		cork	vacuum corking
		30 x 60mm screwcap	
		31.5 x 60mm screwcap	
<b>Quality</b>	electronic	closure presence	

<b>Capsules</b>		PVC, Aluminium, Tin or Poly laminate	
<b>Labels</b>	number of labelling heads	3	front, back + neck/medal
	label presentation	front/back on separate rolls	
	max label height (dimension)	170mm	
	max label width	140mm	Follow WPA guidelines for max recommended width
	min application height from base of bottle	18mm	65mm for medals
	roll core diameter	76mm	
	max roll diameter	290mm	
	roll direction	left hand leading	<b>roll direction #4</b> 
	label type	self adhesive	
	label print	n/a	
<b>Cartons</b>	format	12 or 6 pack upright	hand packed
		laydown	hand packed
	construction	tape or glue	
	in-line printing	dot matrix ink jet	single line max 40 characters across one long side. Print no lower than 75mm from base of carton and no higher than 50mm from top
	carton barcode	by hand	
<b>Palletizing</b>		by hand	
	pallet label	options available	